## **SCORPION 12 PRO Windows**

Industrial-grade rugged tablet with 12.2-inch display and powerful Intel<sup>®</sup> Core™ i5 CPU

## Features

- Intel® Core™ i5-1235U Deca Core processor
- Windows 11 operating system
- Dual capacity battery design
- 1D / 2D barcode scanner
- IP65 protection & MIL-STD-810G certification






### SCORPION 12 PRO Windows: Ultimate rugged tablet with superior protection

Introducing the SCORPION 12 PRO, a 12.2" rugged tablet designed to withstand the toughest environments while delivering top-tier performance. Equipped with advanced features and built to last, this tablet is perfect for professionals who demand reliability and efficiency in any situation.

#### Unmatched Performance with Intel® Core™ i5-1235U Processor

At the heart of the SCORPION 12 PRO lies the powerful Intel<sup>®</sup> Core<sup>™</sup> i5-1235U Deca Core processor, ensuring seamless multitasking and superior performance. Paired with the latest Windows 11 operating system, this tablet offers a user-friendly interface and enhanced security features, making it an ideal choice for both field and office work. The SCORPION 12 PRO is engineered to endure harsh conditions, boasting IP65 dust and water protection as well as MIL-STD-810G certification. Whether you're working in extreme weather or challenging industrial environments, this tablet can handle it all. Its robust design ensures that your device remains operational, safeguarding your data and productivity.

### Appearance and dimensions (in mm)

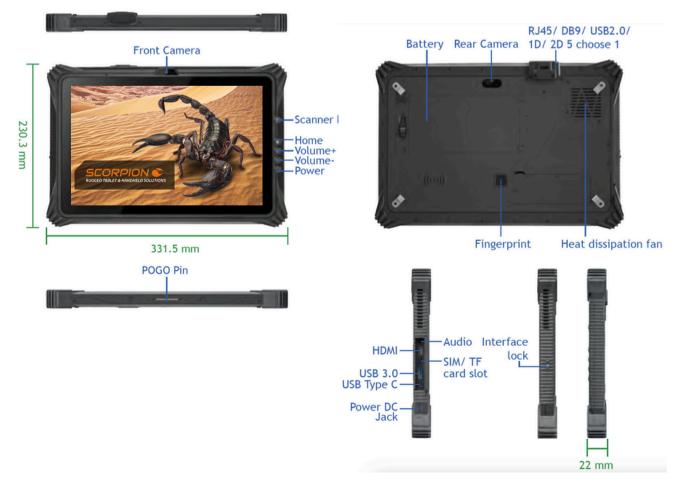

# **SCORPION 12 PRO Windows**



Industrial-grade rugged tablet with 12.2-inch display and powerful Intel<sup>®</sup> Core™ i5 CPU

| SYSTEM     Inter Cons <sup>4</sup> dr USAJ Daea Gos       CPU and Cons <sup>4</sup> dr USAJ Daea Gos     Inter Cons <sup>4</sup> dr USAJ Daea Gos       Stochton System     Windows I       Stochton System     Windows I       Stochton System     Windows I       Stochton System     Stochton I       Stochton System     Stochton I       Stochton Stoch   |                       |   |
|--|-----------------------|---|
| Pick     imit Control       Devards 90     Mark 30       Devards 90     Mark 30       Devards 90     Mark 30       Devards 90     Scala 100000000000000000000000000000000000   | Specifications        | SCORPION 12 PRO Windows                                     |
| shapkani kakana k | SYSTEM                |   |
| Appending System     Middeal       Security     Middeal       Security     SecUropal       Security     SecUropal       Security     SecUropal       Display for the security     SecUropal       SecUropal     SecUropal </td <td>CPU</td> <td>Intel® Core™ i5-1235U Deca Core</td>   | CPU                   | Intel® Core™ i5-1235U Deca Core                             |
| Eachiny     TM 20       BAM     GRI PCDR4       Storage coport     256 G       Deploy Ary TOME     V       Deploy Ary TOME     V       Storage coport     200 (S00 (S00 (S00 (S00 (S00 (S00 (S00 (   | Graphics              | Intel <sup>e</sup> Iris <sup>e</sup> Xe                     |
| RAM     KCR 1PCDR4       Storage compain     Storage   | Operating System      | Windows 11  |
| Basege capage     2668       DISPLAY / TOUCH     21:000em/#5 IFT LCD       Baselution     12:000em/#5 IFT LCD       Reselution     12:0000em/#5 IFT LCD       Resel  | Security              | TPM 2.0   |
| Display / Touch     Comparison       bisplay size     2.2 (S0 9km) MS TFT LCD       bisplay size     (V20 1 200       bisplay size     (V20 1 200       bisplay size     (V20 1 Projected Capacitive       bisplay size     (V20 N Projected Capacitive       COMMUNICATION     V       WLAN     MLAN - 802 Illab.diagh.kn/sukwac.ox, 2.4CH2/S 8CH2       MLAN     MLAN - 602       NYAN     Generation       Statistica     Statistica       MLAN     Statistica       MLAN     Statistica       MLAN     Statistica       MLAN     Statistica       MLAN     Statistica       MLAN   | RAM                   | 16GB LPDDR4   |
| bipping     21/30%miPSTTLCD       issuina     1/202       iss  | Storage capacity      | 256GB   |
| Resolution     1920 x 1200       Trachersen     10-Port Projected Capasitive       Standpring     40 nis       COMMUNCATION     Non-Scatter Capasitive       WLAN     Scatter Capasitive Capasitive       Standpring     Scatter Capasitive Capasitive       WLAN     Scatter Capasitive Capasitinte Capasitive Capasitive Capasitive Capasitive Capasit   | DISPLAY / TOUCH       |   |
| Inductore     Inductor       Bingheness     40 onts       COMMUNICATION     V       WAA     MAA-602 Ilo.bid.ag.buk.rr.ux wa.co.x 2 4GHJ/S 8GHz       Bikatooh     Bikatooh SI       Communication     CACOMASS, optional Biedou       WAA     62 CLONASS, optional Biedou       WAA     Maxi-ag       WAA     62 CLONASS, optional Biedou       WAA     63 CLONASS, optional Biedou       WAA     63 CLONASS, optional Biedou       WAA     63 CLONASS, optional Biedou       WAA     64 CLONASS, optional Biedou       Nationa     Maxia-ag       WAA     64 CLONASS, optional Biedou       Visiona     CLONASS, optional Status       Visiona     CLONASS, optional Status       Visiona     Visional Clonas, optional Status       Visiona     Visional Clonas, optional Status       Visiona  | Display Size          | 12.2" (30.98cm) IPS TFT LCD                                 |
| singlimes     400 nts       COMMUNICATION     V       WLAN     WLAN = 602 llab.de.gh.ik.nr.uv.wa.cox.240Hz/580Hz       Balerooh 5.1     Second 5.1       CASS     OS - SLONASS optional Berdou       WMAN     WAN = 40       WC     Yes       NTERFACE     Yes       Usias 0.7 type A     buiss 0.7 type A       Usias 0.7 type C     Yes       Standord exphore jock     buiss 0.7 type C       Standord exphore jock     Second Bendord exphore jock       Standord exphore jock     Second Bendord       Standord Exphore Sec   | Resolution            | 1,920 x 1,200   |
| COMMUNICATIONWLANWLAN-80218b.de.gh.lk.ru u.w.oc.ox.24GHz/S8GHzBluetothBluetoth S1BluetothBluetoth S1CNSSCPS. GLONASS. optional BedouWMANWWAN-4GWUAN-4GVesINTERFACEVesUSBUSB 30 Type CVideoh. USB 30 Type CStorm standard derphone jockAudiob. Somm standard derphone jockStorm Standard derphone jock  | Touchscreen           | 10-Point Projected Capacitive                               |
| MAN     MAN = N2A Habdleghuknruuwacax 24GHz/SBGHz       Budooth     Budooth SI       Budooth     Budooth SI       GNSS     GNS GONASS.opionol Biddou       WMA     GNS GONASS.opionol Biddou       NTEFACE     J       USB     Sign Son Type C       USB     GNS GONASS.opionol Biddou       View Son Type C     Sign Son Type C       Sign Son Son Type C     Sign Son Type C       Sign Son Son Type C     Sign Son Type C       Sign Son Son Type C     Sign Son Son Type C       Sign Son Son Son Type C     Sign Son Son Type C       Sign Son Son Typ  | Brightness            | 400 nits  |
| Blutooth     Blutooth S1       GNS GO NASS. optional Badou       WMAN     95. GL ONASS. optional Badou       WMAN     40       WMAN     95. GL ONASS. optional Badou       WFC     Vac       Vac     95. GL ONASS. optional Badou       NTEFFACE     Vac       USB     S0 Type A       Vac     S0 S0 Type A       Vac     KSB S0 Type A       Sacoda Songe Songe Son   | COMMUNICATION         |   |
| SNS     GPS. GLONASS. optional Baldou       WWAN     WWAN-4G       WWAN     Yea       NFC     Yea       INTERFACE     Yea       USB     Yea       Yea     Yea       USB     Yea  | WLAN                  | WLAN - 802.11a.b.d.e.g.h.i.k.n.r.u.v.w.ac.ax, 2.4GHz/5.8GHz |
| WWAN     WWAN-40       WWAN-40     Yes       NTERFACE     V       USB 30 Type A     Standard S0 Type A       USB 30 Type C     Standard S0 Type C       Audo     X Smm standard eorphone jock       Expansion     X Signi POGO pin       Kromson     X Izpin POGO pin       EXPUPMENT     V       Serecele Reader     ID /2D       Serecele Reader     ID /2D       Camera 20 MP     Standard eorphone jock       Serecele Reader     ID /2D       Camera 20 AMP     Serecele Reader       Serecele Reader     ID /2D       Camera 20 AMP     Serecele Reader       Strond Commera 20 AMP     Serecele Reader  | Bluetooth             | Bluetooth 5.1   |
| NFC     Yes       INTERFACE  <   | GNSS                  | GPS, GLONASS, optional Beidou                               |
| INTERFACE     Image: Constraint of the state of                               | WWAN                  | WWAN - 4G   |
| Addition     Addition       USB     X USB 30 Type C       Video     X HDM114 Type C       Audio     X Smm standard earphone jack       Expansion     X TF Jelr (mox.128GB) for SDHC/SDXC       Dther     x Ixpn POGO pin       ECUIPMENT     V       Barcode Reader     10 / 2D       Sensors     G-Sensor, Fingerprint       Camera     20 MP       Speker     x 000mAh / 74V (Bult-in)       Scoomah / 74V (Bult-in)     x 300mAh / 74V (Bult-in)       Scoomah / 74V (Bult-in)     x 300mAh / 74V (Bult-in)       Speker     900mAh / 74V (Bult-in)       Speker     900mAh / 74V (Bult-in)       Scoomah / 74V (Bult-in)     x 300mAh / 74V (Bult-in)       Scoomah / 74V (Bult-in)     x 300mAh / 74V (Bult-in)       Speker     900mAh / 74V (Bult-in)       Speker     900mAh / 74V (Bult-in)       Scoomah / 74V (Bult-in)     x 300mAh / 74V (Bult-in)       Scoomah / 74V (Bult-in)     x 300mAh / 74V (Bult-in)       Speker     900mAh / 74V (Bult-in)       Speker     900mAh / 74V (Bult-in)       Scoomah / 74V (Bult-in)     100mAh / 74V (Bu  | NFC                   | Yes   |
| UsbB 30 Type C       Video     Ix HXMI 14a Type C       Audio     Ix 35mm standard earphone jack       Expansion     Ix T5 alo (max. 1286B) for SDHC/SDXC       Date     Ix 12pin PGG pin       Common     Ix 12pin PGG pin       Date     Ix 12pin PGG pin       Sensor Reader     ID / D       Sensor Fingerprint     Font Camera: 2.0 MP       Read Camera: 2.0 MP     Read Camera: 2.0 MP       Sensor Fingerprint     Sonowh / 7.4V (Bult-In)       Read Camera: 2.0 MP     Sonowh / 7.4V (Removable)       Speaker     IX 200mAh / 7.4V (Removable)       Speaker     Sonowh / 7.4V (Removable)       Speaker     Speaker       Speaker     Speaker       Speaker     Speaker       Speaker     Speaker       Speaker     Speaker  | INTERFACE             |   |
| Audio     Ix Samm standard earphone jack       Expansion     ix Samm standard earphone jack       Expansion     ix TF elot (max, 128GB) for SDHC/SDXC       Dither     ix Izpin POGO pin       EOUIPMENT     Image: Summary Solution       Barcode Reader     10 / 2D       Sensors     G-Sensor. Fingerprint       Camera     20 / AP       Rear Camera: 80 / MP       Speaker     2 x 0.8W       Speaker     2 x 0.8W       Speaker     3 x 0.0M / 7 4 / (Removable)       Power Adapter     9 x 0.00m / / 7 4 / (Removable)       Orter  | USB                   |   |
| Expansion     It F Eiot (mox. 128GB) for SDHC/SDXC       Expansion     Ix TF siot (mox. 128GB) for SDHC/SDXC       Status     K SIM-Slot       EQUIPMENT     Ix 12pin POGO pin       EQUIPMENT     Image: Some of the Status       Sensors     G - Sensor, Fingerprint       Camera     Front Camera: 2.0 MP       Specker     2x 0.8W       Specker     2x 0.8W       Specker     2x 0.8W       Specker     2x 0.8W       SomonAh / 7.4V (Built-Im)       x 6.300mAh / 7.4V (Built-Im)       x 6.300mAh / 7.4V (Removable)       Prover Adapter     PV / 342A       OTHER     20°C ~ 60°C       Storage Temperature     - 20°C ~ 60°C       Storage Temperature     - 30°C ~ 70°C       Dimensions     393 x 230 3 x 26 mm       Weight     1500 g       Prating     P65  | Video                 | 1x HDMI 1.4a Type C   |
| Exponsionix SIMSlotDotherki Izpin POGO pinEQUIPMENT  | Audio                 | 1x 3.5mm standard earphone jack                             |
| EQUIPMENT     Image: Constraint of the sense of                               | Expansion             |   |
| Action     Action       Barcode Reader     ID / 2D       Sensors     G-Sensor, Fingerprint       Camera     Front Camera : 20 MP<br>Rear Camera : 80 MP       Speaker     2x 0.8W       Battery     2x 0.8W       Power Adopter     IV / 342A       OTHER  | Other                 | lx l2pin POGO pin   |
| Sensors     G-Sensor, Fingerprint       Camera     Font Camera: 2.0 MP<br>Rear Camera: 8.0 MP       Specker     2x 0.8W       Specker     2x 0.8W       Battery     x 700mAh / 7.4V (Bullt-In)<br>1x 6.300mAh / 7.4V (Bellt-In)<br>1x 6.300mAh / 7.4V (Bellt-In)<br>1x 6.300mAh / 7.4V (Bellt-In)<br>1x 6.300mAh / 7.4V (Bellt-In)       Power Adapter     IV / 3.42A       OTHER     -20°C ~ 60°C       Operating Temperature     -20°C ~ 60°C       Storage Temperature     -20°C ~ 70°C       Relative Humidity     95% (non-condensing)       Dimensions     39.3 x 230.3 x 26 mm       Weight     1500 g       Preting     IP65   | EQUIPMENT             |   |
| Camera   Front Camera: 20 MP     Rear Camera: 80 MP     Speaker   2x 0.8W     Battery   k 700mAh / 7.4V (Built-in)<br>k 6.300mAh / 7.4V (Removable)     Power Adapter   19V / 3.42A     OTHER   -     Operating Temperature   -0°C ~ 60°C     Storage Temperature   -30°C ~ 70°C     Relative Hundity   95% (non-condensing)     Dimensions   393 x 230 3 x 26 mm     Weight   IS00 g     Pating   Ho5   | Barcode Reader        | ID / 2D   |
| Camera   Rear Camera: 8.0 MP     Speaker   2x 0.8W     Battery   1x 700mAh / 7.4V (Built-in)<br>tx 6.300mAh / 7.4V (Removable)     Power Adapter   19V / 3.42A     OTHER   -20°C ~ 60°C     Storage Temperature   -20°C ~ 60°C     Relative Humidity   95% (non-condensing)     Dimensions   339.3 x 230.3 x 26 mm     Weight   1.500 g     Parting   Post   | Sensors               | G-Sensor, Fingerprint                                       |
| Battery   k 200mAh / 7.4V (Built-in)     Battery   k 200mAh / 7.4V (Built-in)     Power Adapter   lv / 3.42A     OTHER   -     Operating Temperature   -20°C ~ 60°C     Storage Temperature   -30°C ~ 70°C     Relative Humidity   5% (non-condensing)     Dimensions   39.3 x 230.3 x 26 mm     Weight   1.500 g  | Camera                |   |
| Battery ix 6.300mAh / 7.4V (Removable)   Power Adapter iv / 3.42A   OTHER -0°C ~ 60°C   Operating Temperature -20°C ~ 60°C   Storage Temperature -30°C ~ 70°C   Relative Humidity 95% (non-condensing)   Dimensions 393 x 2303 x 26 mm   Weight 1500 g   Pating P65  | Speaker               | 2x 0.8W   |
| OTHER  | Battery               |   |
| Operating Temperature     -20°C ~ 60°C       Storage Temperature     -30°C ~ 70°C       Relative Humidity     95% (non-condensing)       Dimensions     39.3 x 230.3 x 26 mm       Weight     1.500 g       PRating     P65  | Power Adapter         | 19V / 3.42A   |
| Storage Temperature -30°C ~ 70°C   Relative Humidity 95% (non-condensing)   Dimensions 39.3 x 230.3 x 26 mm   Weight 1.500 g   PRating P65   | OTHER                 |   |
| Relative Humidity 95% (non-condensing)   Dimensions 339.3 x 230.3 x 26 mm   Weight 1.500 g   P Rating P65  | Operating Temperature | -20°C ~ 60°C  |
| Dimensions 339.3 x 230.3 x 26 mm   Weight 1.500 g   IP Rating IP65   | Storage Temperature   | -30°C ~ 70°C  |
| Weight 1,500 g   P Rating IP65   | Relative Humidity     | 95% (non-condensing)  |
| P Rating P65   | Dimensions            | 339.3 x 230.3 x 26 mm                                       |
|  | Weight                | 1.500 g   |
| Certifications MIL-STD-810G  | IP Rating             | IP65  |
|  | Certifications        | MIL-STD-810G  |

# **SCORPION 12 PRO Windows**



Industrial-grade rugged tablet with 12.2-inch display and powerful Intel<sup>®</sup> Core™ i5 CPU

| Ordering Information    | SCORPION 12 PRO Windows                                       |
|-------------------------|---|
| PACKING LIST            |   |
| SCORPION 12 PRO Windows | 1x SCORPION 12 PRO Windows<br>1x Hand Strap<br>1x Power Cable |
| OPTIONAL ACCESSORIES    |   |
| Removable Battery       | For SCORION 12 PRO  |
| Mounting Holder         | Mounting for car or forklift                                  |
| Docking Station         | Charging station for working space                            |
| Power Adapter           | Туре С I9V / 3.42А  |